

Installation guide for windshield

Date: 17/05/2019

№2019-004

Models	VIN Identification number
CFMOTO U10 EPS	All

The information stated in this document is veracious only at the moment of publication. We reserve the right to modify the product and change the kit without further notice. Thus, we aren't responsible for provision of updated parts to buyers of previously launched products. Thereby discrepancies are possible between the description of this Installation Guide and actual kit.

The design displayed on pictures can vary from the real one, though the parts shown on pictures are of the same functional purpose and design as described.

The information stated in this guide is of a purely reference character.

The installation steps of windshield & wiper kit:

1) Install the fitting of windshield;



2) Install the windscreen motor by tightening 3 bolts;

3) Install the wiper arm;

4) Install the windscreen on ATV in its regular place;

5) Install clamps of windshield on the UTV's safety cage;




6) Tighten the nuts and install plastic caps;



7) Install the hanger of water tank in its regular place in the niche behind the driver's seat;



8) Align the wiper wiring to the water tank and fix it with plastic retainers;

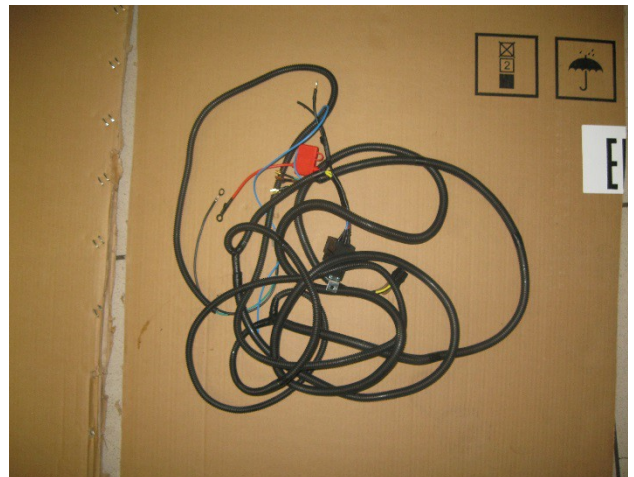



- 9) Put and screw the ground wire under the bolt of water tank hanger (point 7);



- 10) Install the water tank to its regular place and connect the appropriate connector to the pump;




11) Screw the relay connector in the area under the hood;




12) Eject the central panel for Auxiliary equipment and disconnect the connector;



13) Strip the insulation of the white-green shielded wire and connect it with the "controlling" wire of the wiper;

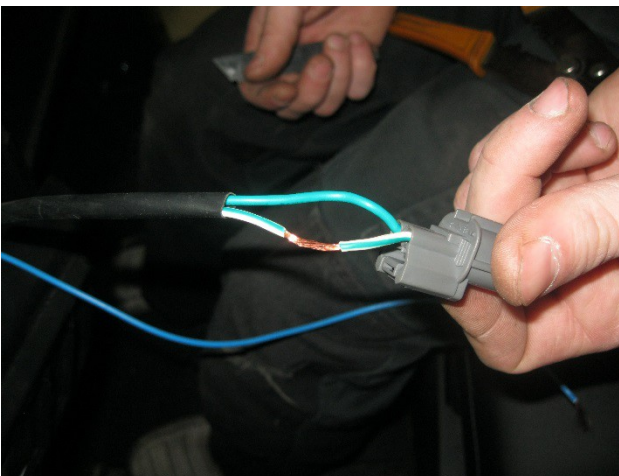

14) Install and connect two buttons of washer and wiper in empty cells on removed panel;

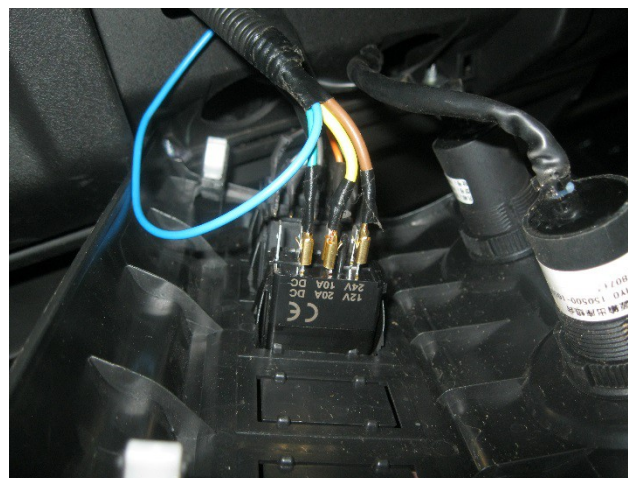


15) Install the removed panel to its regular place;

16) Connect and align the tube for washer fluid from the water tank back along the previously aligned wiring;

17) Align and fix the wiring and washer fluid tube back to the windscreen wiper motor;



18) Connect the power connector to the windscreen wiper motor;

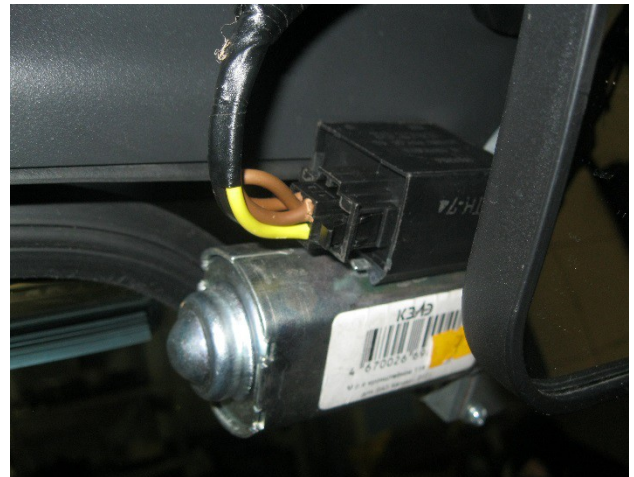

19) Connect the washer fluid tube to the windscreen wiper motor;



20) Connect the power wires of windscreen wiper to the power clamps on the winch relay;





! WARNING !

Drillings in frame or safety cage is strongly prohibited.

21) Check the wiring and tubes are correctly connected and tightened;

22) Check the functionality of the windscreen wiper in all modes.

Specification

Torque specs, N m

Bolt M6

Bolt M8